

FiberXpert 700 – Quad MM/SM Test Kit

The FiberXpert 700 – Quad Attenuation Measurement Kit for Multimode & Singlemode enables intuitive, flexible and fast certification of fiber optic links and provides the data in a documentation.


The FiberXpert 700 Quad MM/SM Test Kit contains the tools necessary to certify fiber optic connections to a variety of common cabling standards in single-mode and multimode networks, commonly referred to in the industry as Tier 1 certification.

The calibrated measurement kit can be used to perform standardized link certification for multimode and singlemode fiber optic links and links and print official test reports directly from the PC software provided on USB stick. For testing, the user has an unlimited number of configurations for different scenarios. Automatic wave-length detection and data storage allow testing to be completed in the shortest possible time, while eliminating the risk of operator error. The measurement results can be stored directly in the internal memory (up to 10 000).

For quick distinction, the result is displayed in color directly on the LCD display as PASS/FAIL status. The kit has a rechargeable lithium polymer battery and offers an extremely long operating time.

FEATURES

- Full-featured Tier 1 fiber link measurement
- Optical loss (attenuation) measurement
- Optical power measurement
- Continuity testing
- Patch cord test / reference fiber test
- Supports up to 7 wavelengths

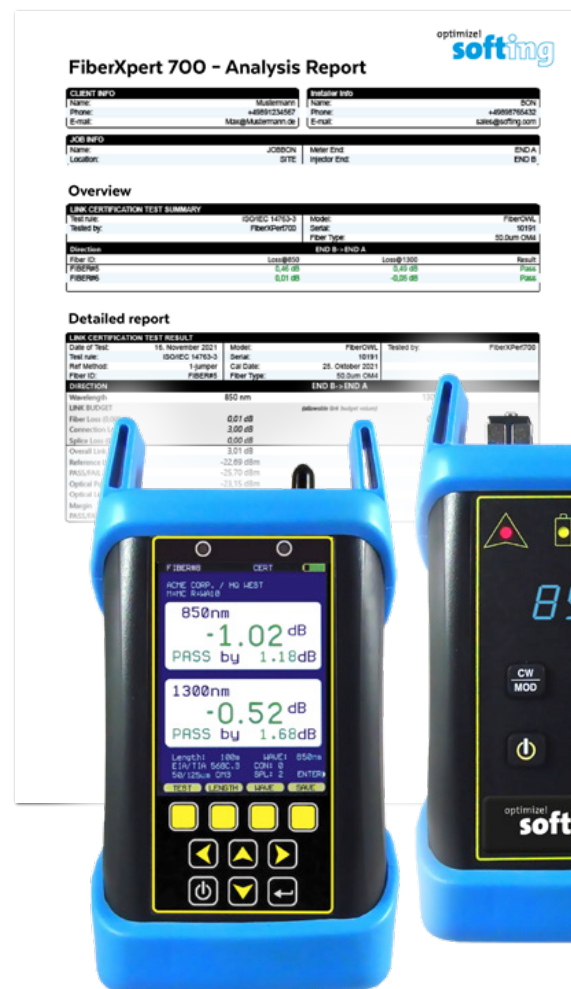

FIBERXPERT 700 OPTICAL POWER METER

| Parameters | Specification |
|-------------------------------------|--|
| Detector Type | InGaAs |
| Calibrated Wavelengths ¹ | 850, 980, 1300, 1310, 1490, 1550, 1625 |
| Measurement Range | +5 to -70dBm |
| Accuracy | ±0.15dB |
| Display Resolution | 0.01dB |
| Battery Life | Up to 50 hours (Lithium Polymer) |
| Detector Connector Type | 2.5mm / 1.25mm universal |
| Data Storage | Up to 10 000 data points |
| Displayed Measurement Units | dBm, dB, mW, µW, nW |
| Modes of Operation | CERT, LOSS, OPM |
| Display Type | Hi-resolution Color LCD |
| Auto-shutdown | Yes |
| Operating Temperature | -10 to 55°C |
| Storage Temperature | -30 to 70°C |
| Dimensions | 2.9 x 4.49 x 1.3in (72.9 x 112.3 x 31.8mm) |
| Weight | 12oz (373g) |

1 Bold wavelengths are NIST Traceable Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

QUAD LIGHT SOURCE

| Specification | Multimode | Singlemode |
|-----------------------|---|--|
| Output Type | LED | FP Laser |
| Launch Method | LED | FP Laser |
| Center Wavelength | 850nm: 850 ± 30nm 1300nm: ± 50nm | 1310nm: 1310 ± 20nm 1550nm: 1550 ± 30nm |
| Spectral Width | 850nm: 50nm 1300nm: 180nm | 1310 nm: 2nm 1550 nm: 2nm |
| Source | Class 1M | IEC 60825-1 Class 1M |
| Output Power | -20dBm | -10dBm |
| Output Modes | CW / modulated | CW / modulated |
| Initial Accuracy | ± 0.1dB | ± 0.1dB |
| Battery Life | Up to 150 hours (re-chargeable Lithium Polymer) | |
| Operating Temperature | 0 to 55°C | |
| Storage Temperature | 0 to 75°C | |
| Dimensions | 2.87 x 4.42 x 1.25in (72.9 x 112.3 x 31.8mm) | |
| Weight | 10oz (284g) | |
| Connector Type | SC | |

Conforms to the Harmonized European Standards EN 61326-1 and EN 61010-1.

Supported Cabling Standards

| | |
|--------------|---------------------------------|
| TIA | 568-C.3, 568-3.D |
| ISO | 11801, 14763-3 |
| Ethernet | 1G, 10G, 40G, 100G |
| FTTH | Class A, Class B, Class C |
| User defined | Fixed budget, calculated budget |

Power Meter Ports



Universal detector port
2.5mm adapter (SC,ST, FC)
1.25mm adapter (LC)

Light Source Ports



Multimode source port
Wavelengths: 850/1300nm
Connector type: SC

Singlemode source port
Wavelengths: 1310/1550nm
Connector Type: SC

HEADQUARTERS

Softing IT Networks GmbH
Richard-Reitzner-Allee 6
85540 Haar, Germany

+49 89 45 656 660
info.itnetworks@softing.com
itnetworks.softing.com



ORDERING INFORMATION

Article number **237112**

FiberXpert 700 Quad MM/SM Test Kit

Scope of delivery:

- 1 optical Power Meter
- 1 quad light source
- 1 soft carrying case
- 2 protective rubber boots
- 2 USB download cables (also for battery charge)
- 1 USB flash drive containing Reporter software and product documentation
- 1 universal adapter 1.25mm ferrule
- 1 universal adapter 2.5mm ferrule
- 1 calibration certificate
- 1 quick reference guide


Optional accessories

| | |
|---|---------------|
| 1 Mandrel for testing MM glass fibers | 228018 |
| Multimode SC cable kit (3 x 228060, 2 x 228061, 1 x 228018) | 228305 |
| Multimode LC cable kit (2 x 228303, 1 x 228302, 2 x 228301, 1 x 228018) | 228306 |
| Singlemode SC cable kit (3 x 228304, 2 x 228061) | 228307 |
| Singlemode LC cable kit (1 x 228310, 2 x 228309, 2 x 228300) | 228308 |

You can find additional accessory offers on our website, or contact us:

itnetworks.softing.com/contact

For more information please contact:



©2021 Softing IT Networks GmbH. In line with our policy of continuous improvement and feature enhancement, product specifications are subject to change without notice. Subject to errors and alterations. All rights reserved. Softing and the Softing logo are trademarks of Softing AG. FiberXpert and the FiberXpert logo are trademarks of Softing IT Networks GmbH. All other cited trademarks, product and company names or logos are the sole property of their respective owners.